

**DuraVane** lubricated rotary vane pumps are single-stage pumps with an integrated closed loop oil recirculation system.


- Heavy duty construction.
- Compact design, small footprint.
- High-tech vane material provides long vane life.
- Gas ballast valve is standard.
- Low noise level.
- Low maintenance.
- Air-cooled design.
- Internally mounted inlet check valve.
- High efficiency multi-stage exhaust filter removes 99.9% of exhaust smoke.
- Direct drive.
- Simple to install.




Performance characteristics	
Displacement:	12.7CFM
Final pressure:	1.5Torr
Motor:	1.25HP/60HzTEFC
Voltage:	115/230V/1phase 208/230/460V/3phase
Speed:	3400RPM
Noise level(at 3ft):	63dBA
Oil reservoir cap.:	0.3qt
Oil type:	Duratex 32
Weight:	48Lbs
Inlet conn.:	1/2"NPT
Discharge conn.:	1/2"NPT

RVL013H

Based on 29.92 inch Hg barometric pressure.  
Inlet temperature 70° deg. F.

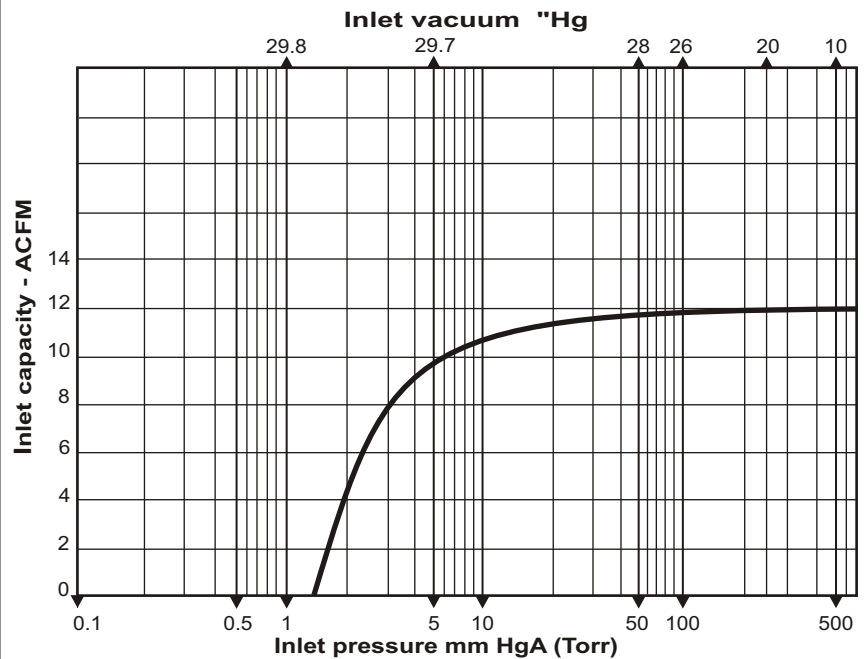

RVL013H

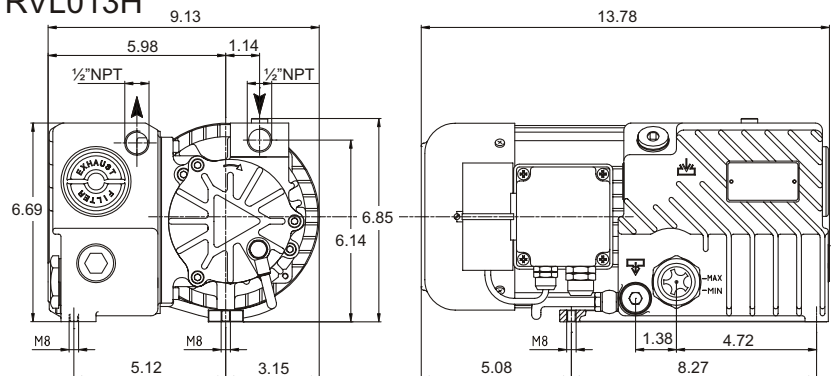

Information contained in this document is for reference only. Subject to change without notice.

Contact us at 1-800-521-2083 or email at: [sales@combinedfluidproducts.com](mailto:sales@combinedfluidproducts.com) • Request Information